


# JEFFERSON CONCRETE CORP.


22850 MURROCK CIRCLE  
WATERTOWN, NY 13601  
TEL(315)788-4171 FAX(315)788-7958

## PRODUCT DESCRIPTION

## BRICK FACED RETAINING WALL

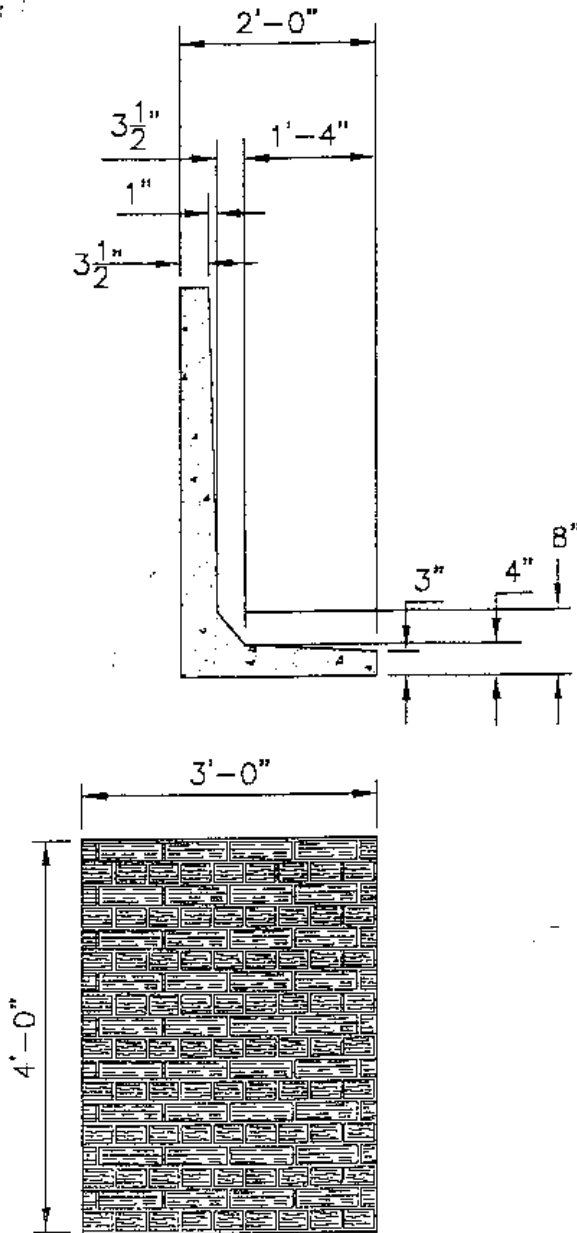

WALLS ANCHORED TOGETHER ON BACK SIDE WITH 1/2" DIA. ANCHOR BOLT AND 2" x 10" STEEL PLATE.

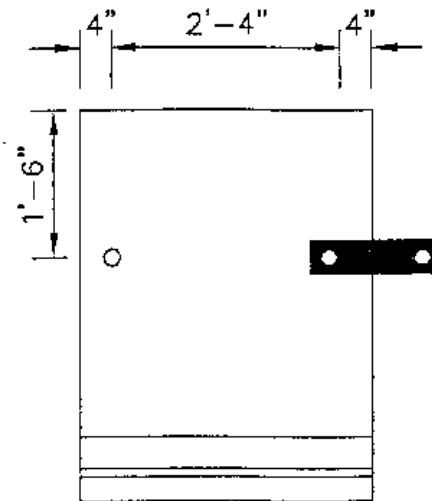

CONCRETE TO BE MIN. 4000 PSI @ 28 DAYS.  
AIR ENTRAINED 5% - 8%  
REINFORCEMENT ASTM A615/A497 (2" COVER)