




JEFFERSON CONCRETE CORP.

22850 MURROCK CIRCLE
WATERTOWN, NY 13601

TEL(315)788-4171 FAX(315)788-7958

PRODUCT DESCRIPTION

48" Ø WELL TILE

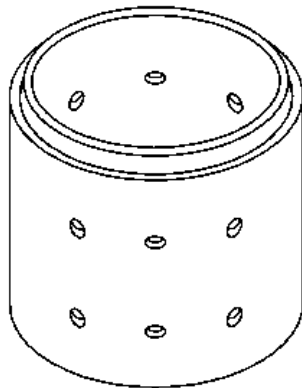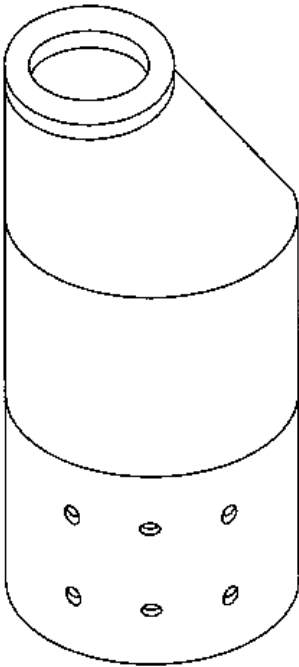

NOTES: CONCRETE TO BE MIN. 4000 PSI @ 28 DAYS.
AIR ENTRAINED 5% - 8%
REINFORCEMENT ASTM A497
RISER SECTIONS AVAILABLE PERFORATED
OR SOLID
FLAT SLAB COVER CAN BE USED IN PLACE OF TAPER TOP

