


# JEFFERSON CONCRETE CORP.

22850 MURROCK CIRCLE  
WATERTOWN, NY 13601  
TEL (315)788-4171 FAX (315)788-7958  
www.jeffersonconcrete.com

## 6'-10" DIAMETER DRYWELL

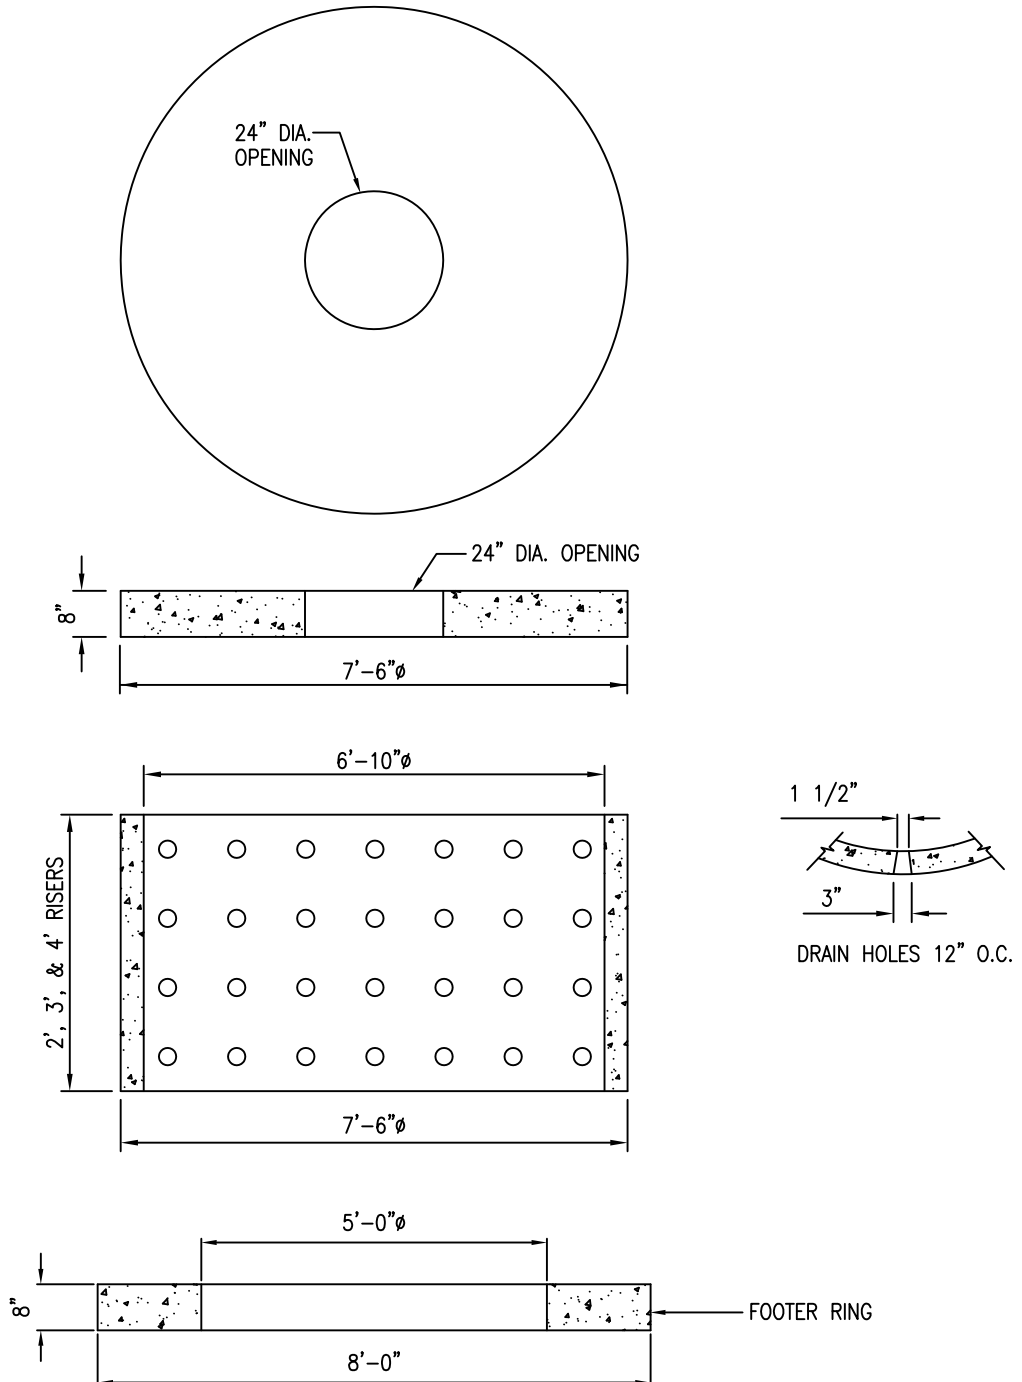

### GENERAL NOTES:

CONCRETE TO BE MIN. 5000 PSI @ 28 DAYS  
HS-20 WHEEL LOAD COVER  
AIR ENTRAINED 5% - 8%  
REINFORCEMENT ASTM A497A615 GRADE 60  
INVERT OPENINGS AS PER PLANS

UPDATED 12/27/10